

I N T O O U T



SIYATONE
BY SIYARAM

WELCOME TO

Siyatone Global Pvt Ltd

Founded in 1998, Siyatone has emerged as a pioneering force in the flooring industry. Its headquarters, advanced manufacturing facilities, and research labs are strategically located in Morbi, India.

Specializing in porcelain and ceramic tiles, Siyatone combines innovative designs with unmatched durability. Supported by 1,250 employees and 8 state-of-the-art minerals, ink, and tile production facilities, Siyatone achieved a remarkable turnover of \$146 million in 2023.

As a trusted leader, Siyatone blends expertise, sustainability, and excellence to meet global demands and shape the future of the flooring industry.




- 
More Than 110k Sq. Mtr.
- 
27+ Year Of Experience
- 
More Than 1250+ Employee
- 
5 Unit Ceramic and 3 Unit Minerals
- 
52+ Country Served
- 
Worldwide Customers

Triangel⁺

Collection

The Triangle+ Collection offers a versatile range of finishes, including glossy, matte, and carved textures. These tiles are ideal for bold and intricate designs, catering to both modern and traditional styles, and providing endless possibilities for creative spaces.

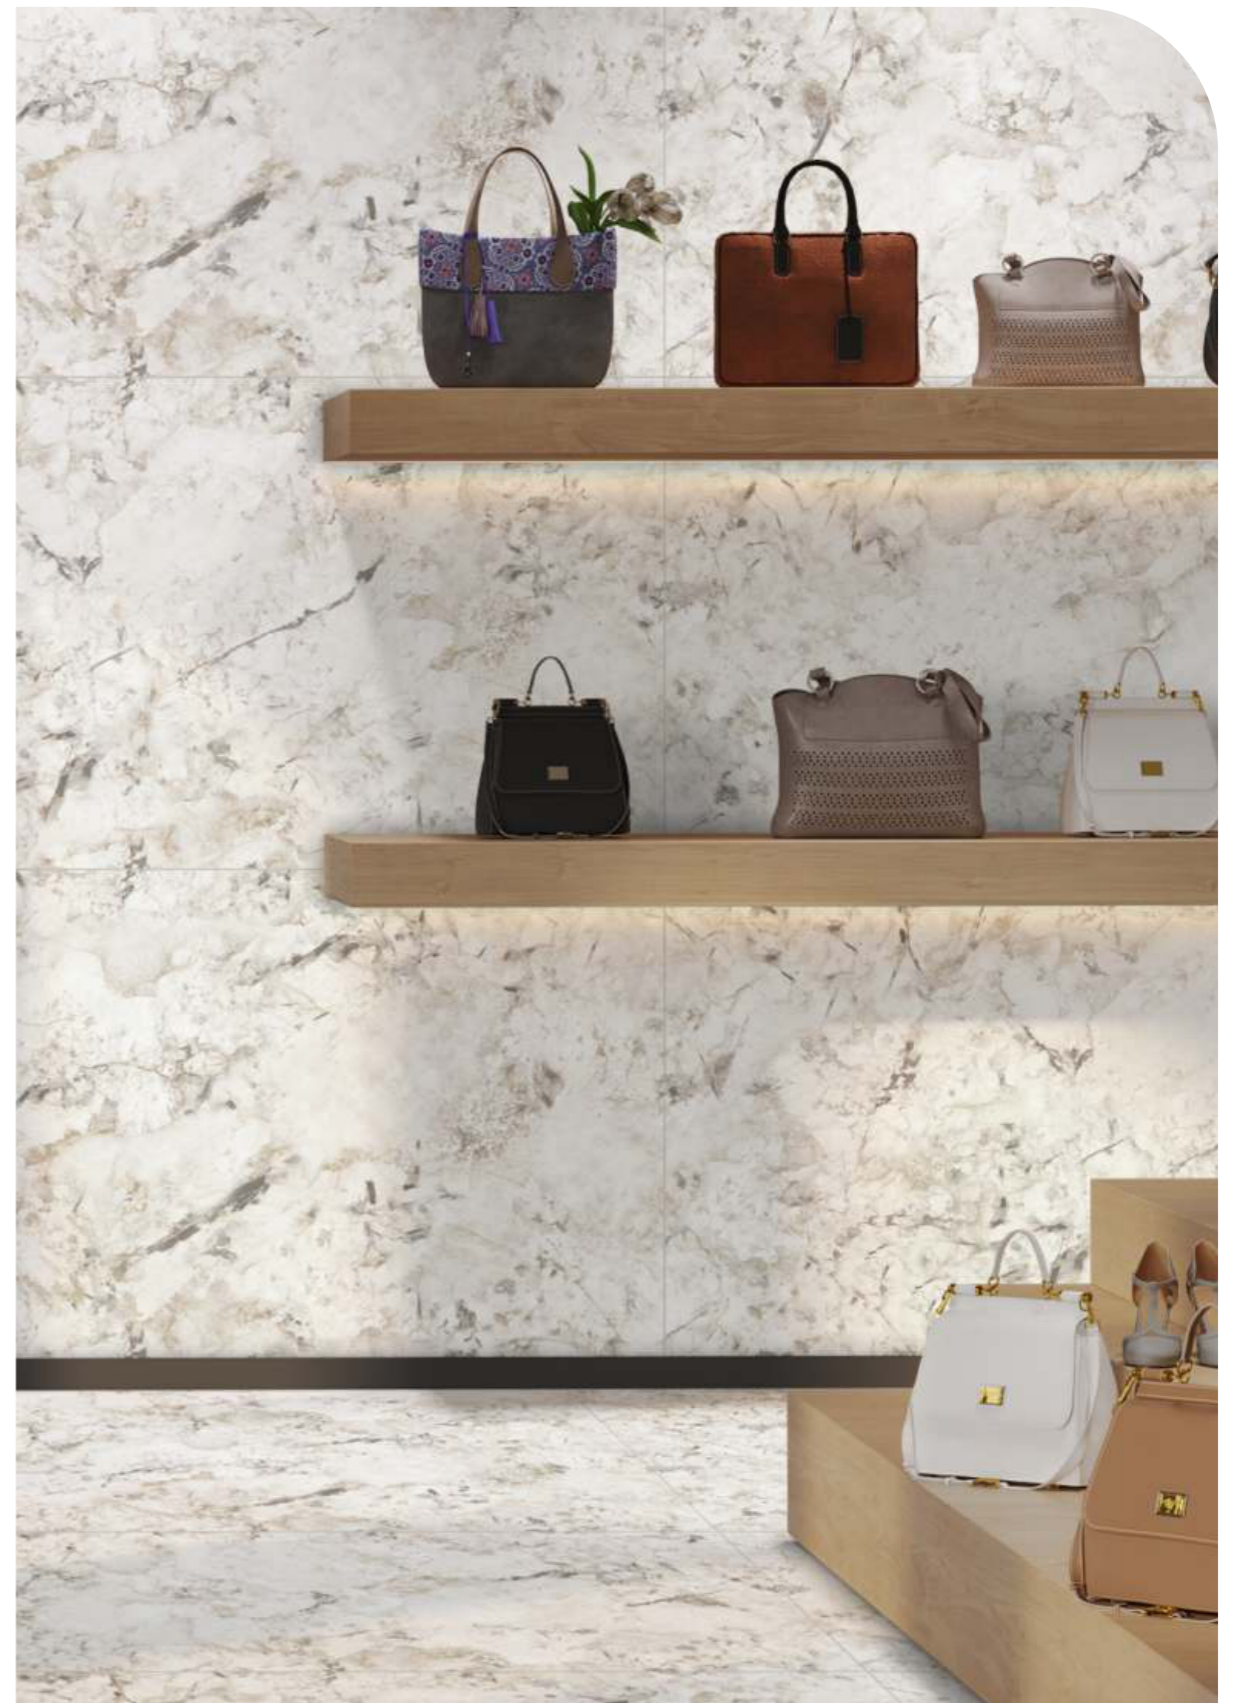

SIYATONE
BY SIYARAM

LIFE IN EVERY
CORNER

हर कोने में जिंदगी

Siyatone brings life to every corner of your space. From walls to floors, our tiles are designed to infuse vibrancy, elegance, and durability into every nook, turning houses into homes and spaces into experiences.



TRANSFORMING SPACES, BREATHING LIFE




INDEX


Page Number/ Name



Alcoma Beige



Alcoma Grey



Alcoma Beige



Alcoma Grey



Statuario Graphit



Classic Bttochino



Montclair Beige



Montclair White



Roslin Awua Dark



Roslin Aqua Light



Silvia Beige



Silvia Grey



Terszo Dark Grey



Alcoma Beige

THICKNESS	FINISH	RANDOM
9 MM	Polished Matt Carving	5



AVAILABLE SIZES

600x1200mm

800X800mm

600x600mm

300x600mm






Alcoma Beige

Alcoma Grey

THICKNESS	FINISH	RANDOM
9 MM	Polished Matt Carving	5

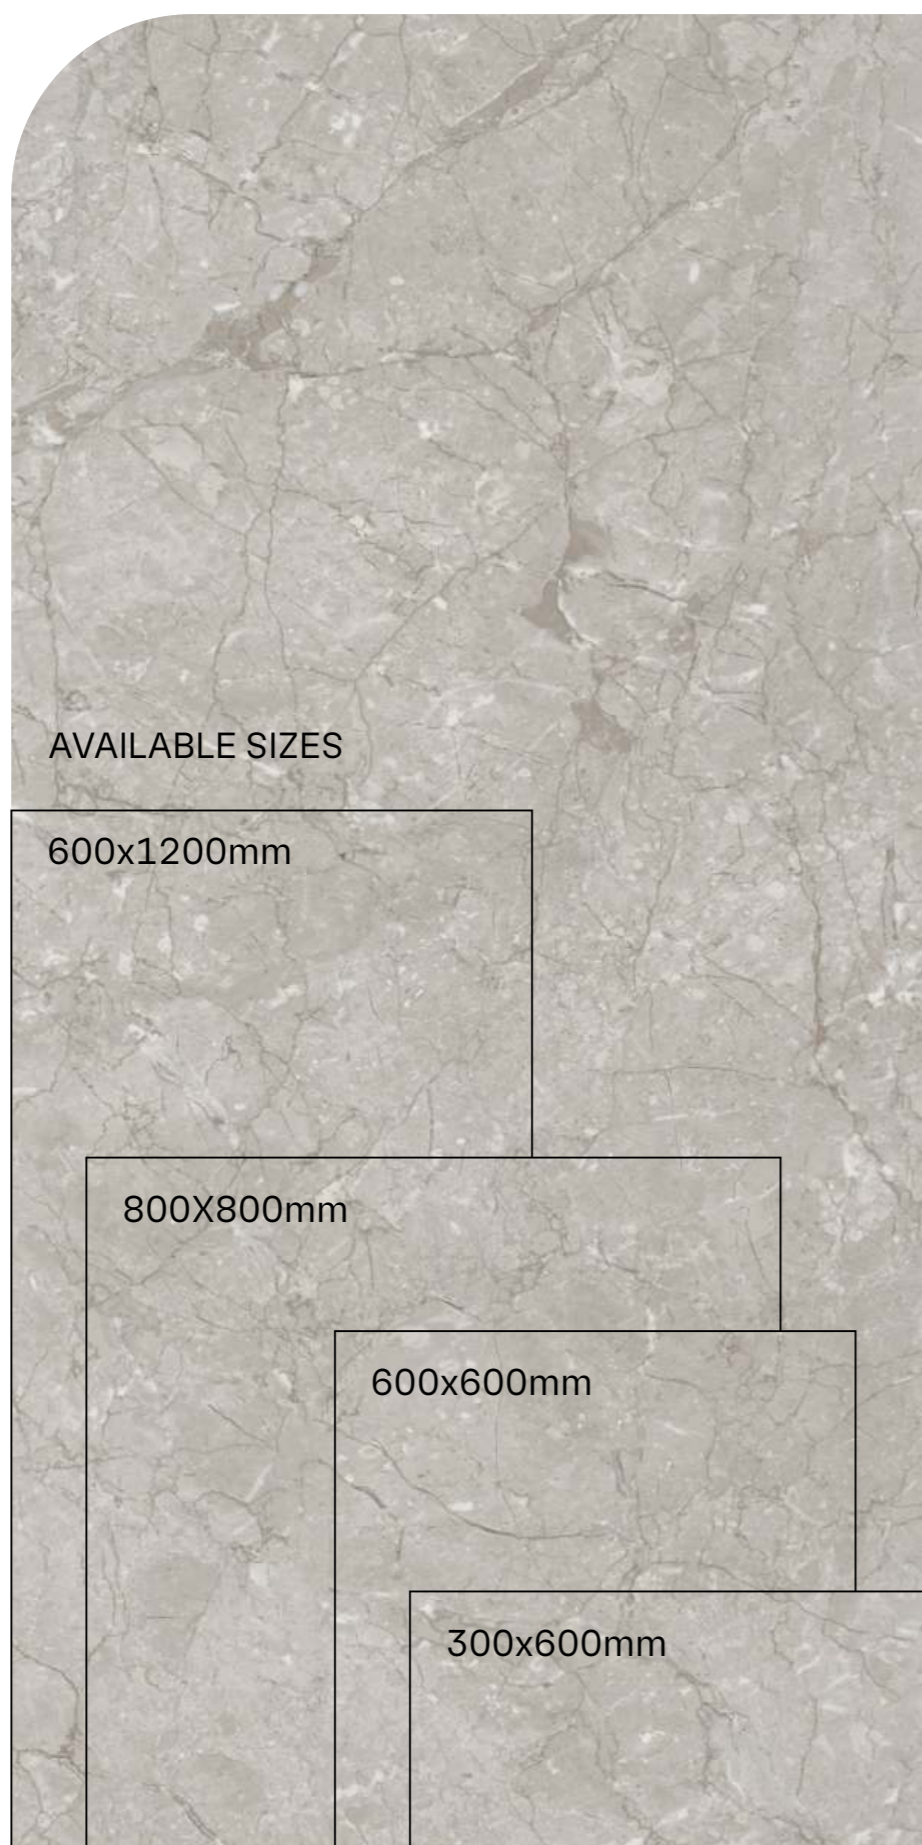



Alcoma Beige

THICKNESS	FINISH	RANDOM
9 MM	Polished Matt Carving	4



AVAILABLE SIZES

600x1200mm

800X800mm

600x600mm

300x600mm





Alcoma Beige

Alcoma Grey

THICKNESS	FINISH	RANDOM
9 MM	Polished Matt Carving	4




AVAILABLE SIZES

600x1200mm

800X800mm

600x600mm

300x600mm

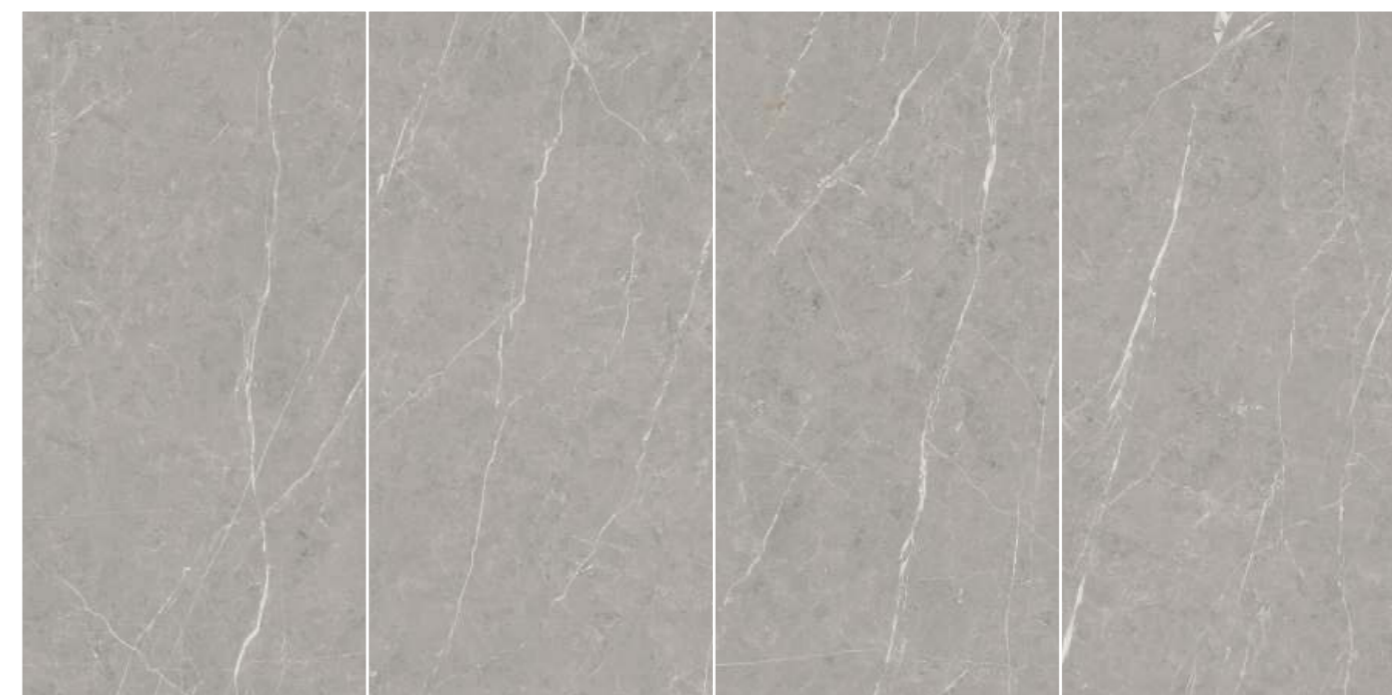



Statuario Graphit

THICKNESS	FINISH	RANDOM
9 MM	Polished Matt Carving	4



AVAILABLE SIZES

600x1200mm

800x800mm

600x600mm

300x600mm




ANTI-SLIP



Classic Bttochino

THICKNESS	FINISH	RANDOM
9 MM	Polished Matt Carving	4

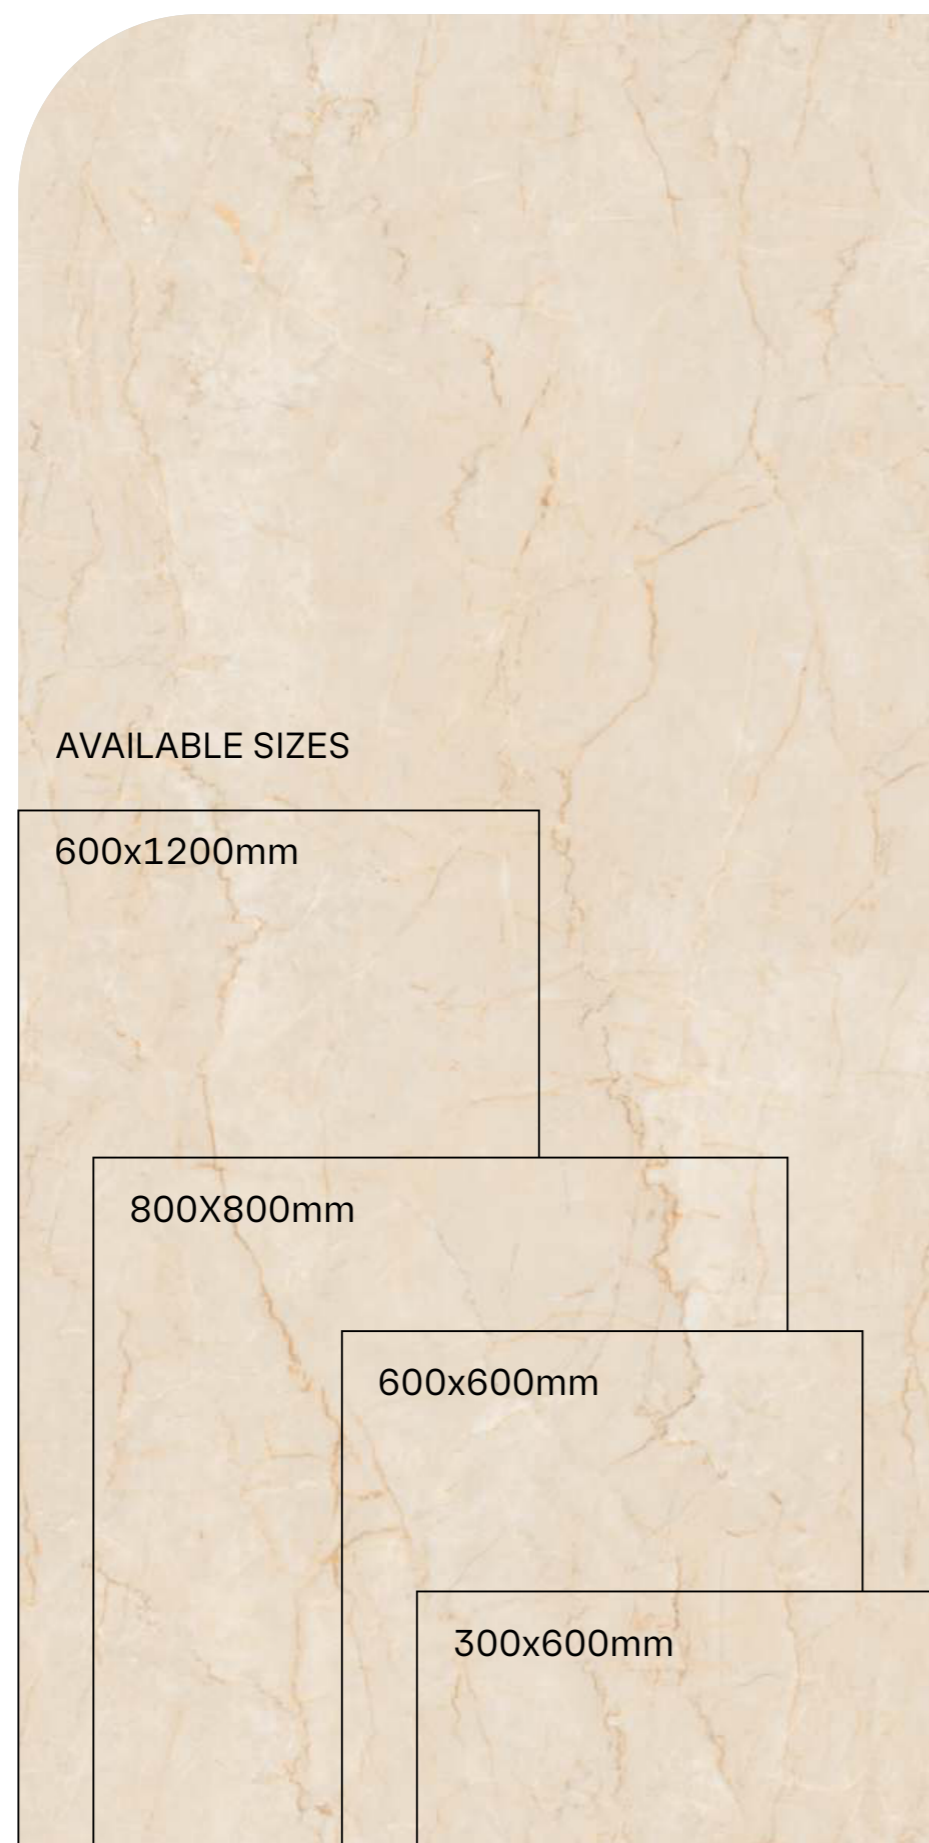

AVAILABLE SIZES

600x1200mm

800x800mm

600x600mm

300x600mm





Montclair Beige

THICKNESS	FINISH	RANDOM
9 MM	Polished Matt Carving	4



ANTI-SLIP



Montclair Beige

Montclair White

THICKNESS	FINISH	RANDOM
9 MM	Polished Matt Carving	4





Montclair White

Roslin Awua Dark

THICKNESS	FINISH	RANDOM
9 MM	Polished Matt Carving	4






Roslin Awua Dark

Roslin Aqua Light

THICKNESS	FINISH	RANDOM
9 MM	Polished Matt Carving	4

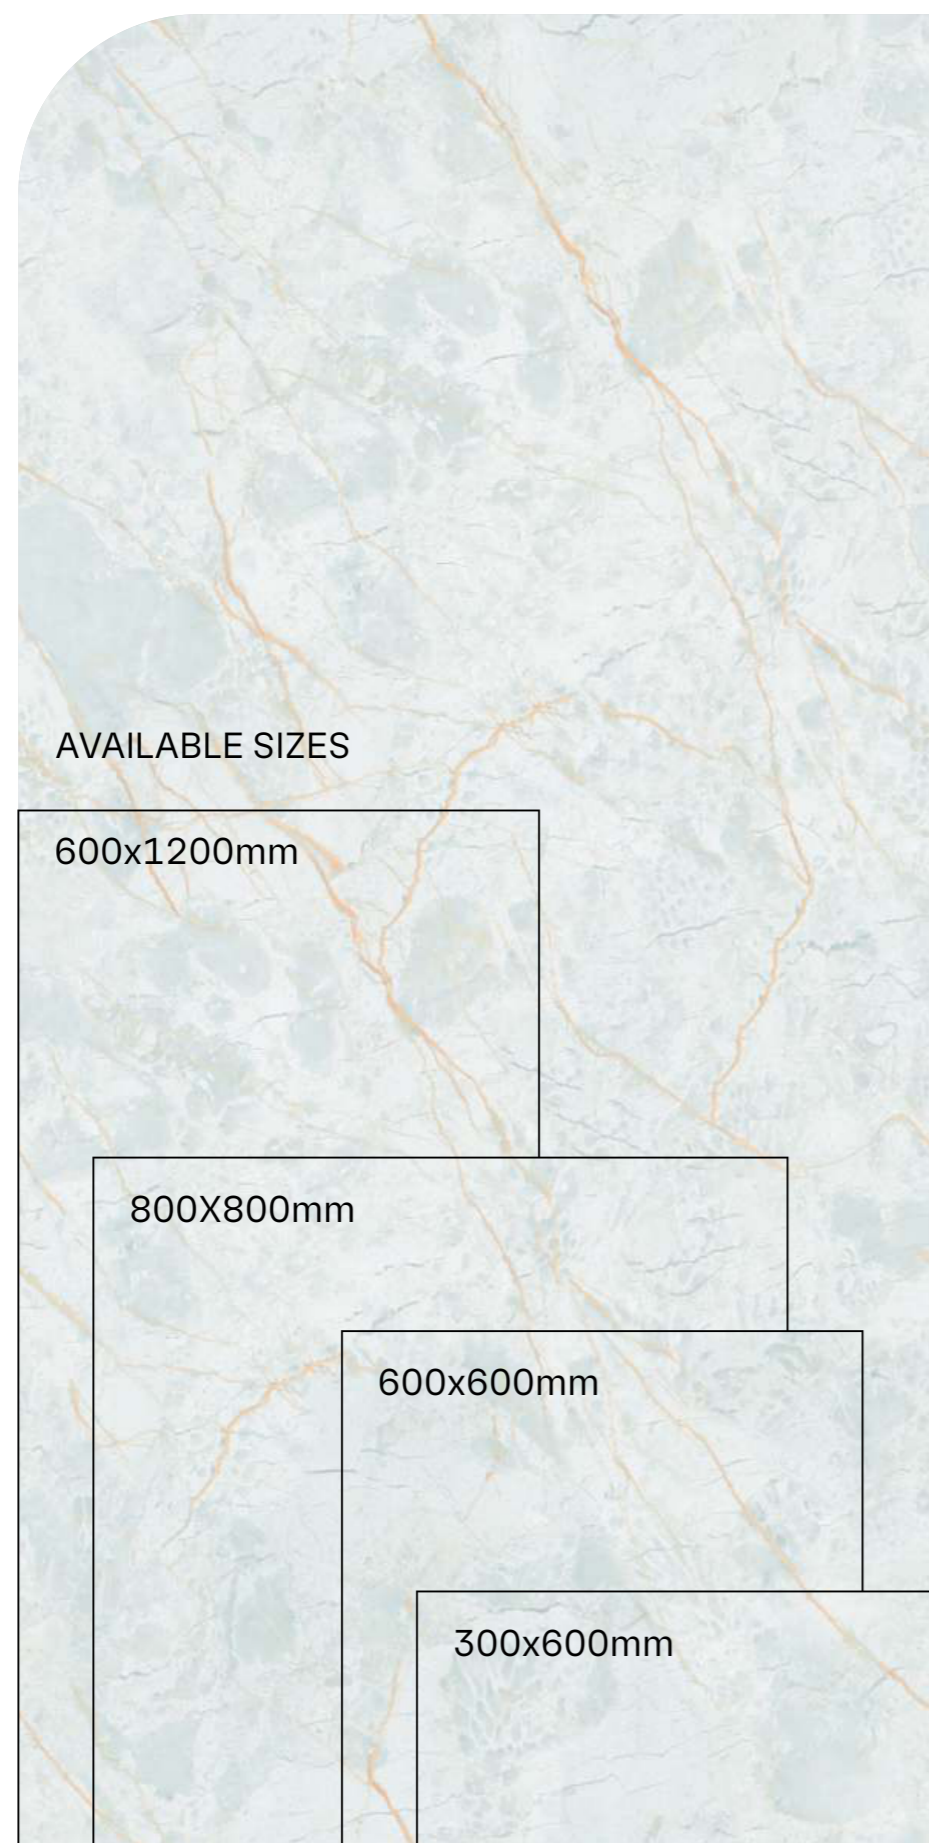




Roslin Aqua Light

Silvia Beige

THICKNESS	FINISH	RANDOM
9 MM	Polished Matt Carving	4

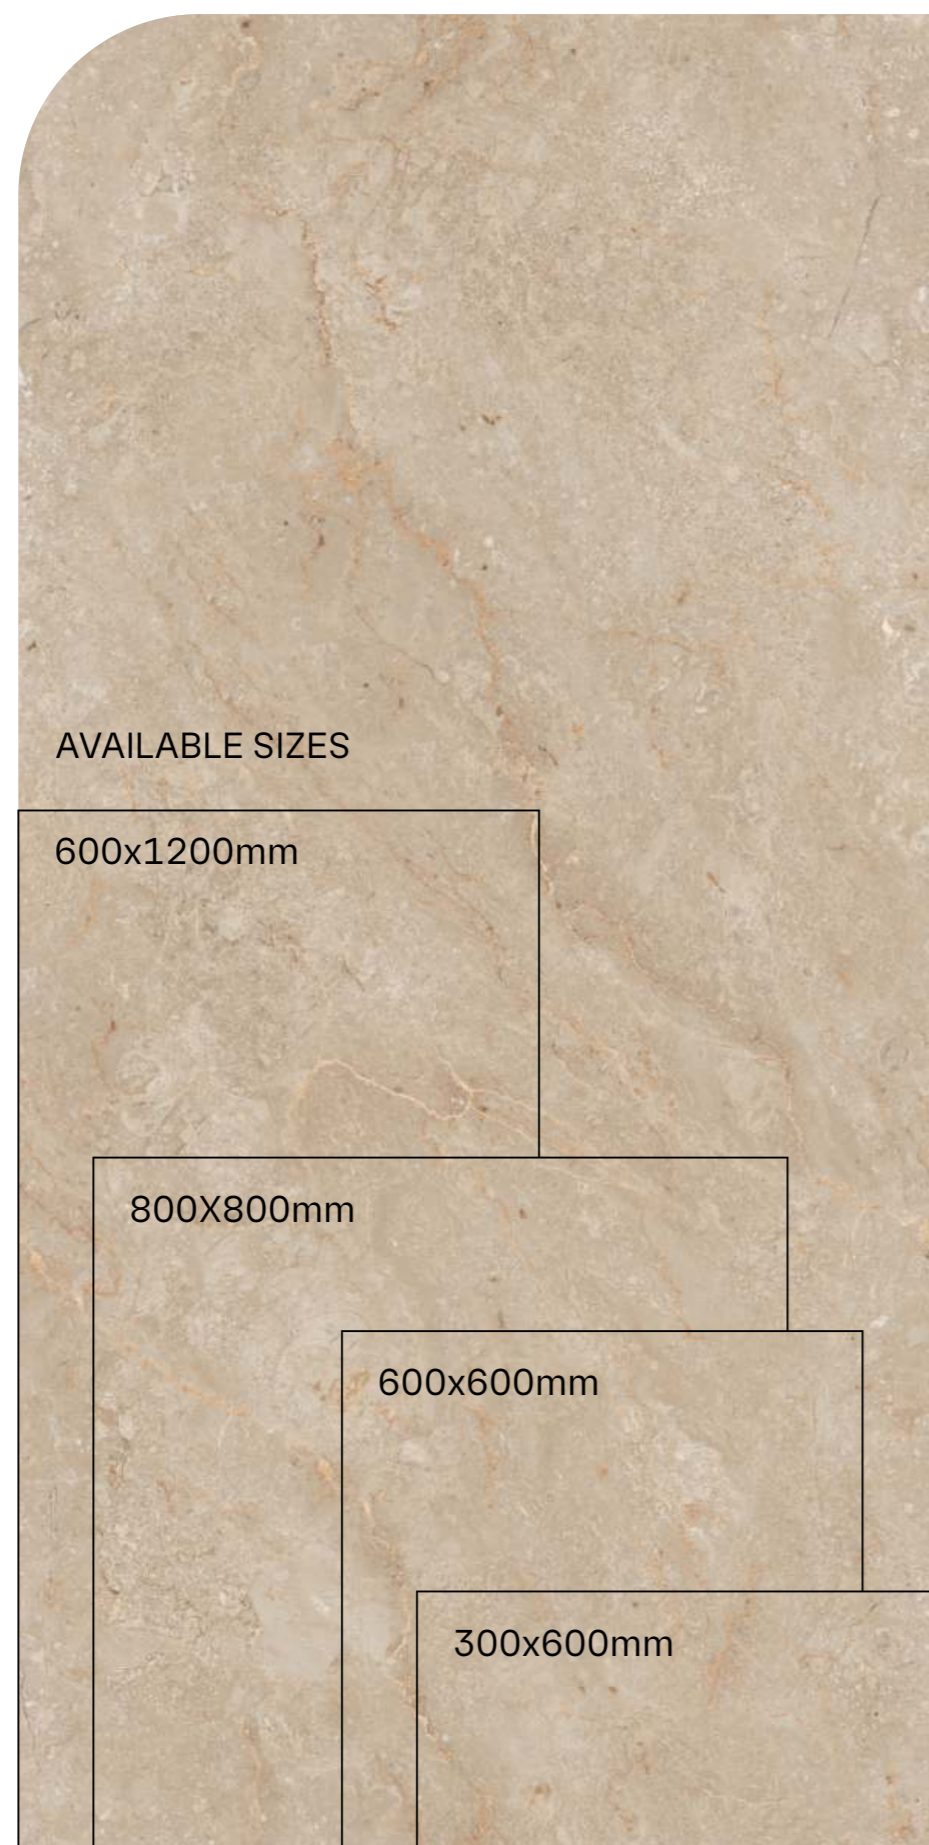

AVAILABLE SIZES

600x1200mm

800X800mm

600x600mm

300x600mm



NATURAL



ANTI-SLIP



Silvia Grey

THICKNESS	FINISH	RANDOM
9 MM	Polished Matt Carving	5



AVAILABLE SIZES

600x1200mm

800X800mm

600x600mm



300x600mm





Terrazo Dark Grey

THICKNESS	FINISH	RANDOM
9 MM	Polished Matt Carving	4

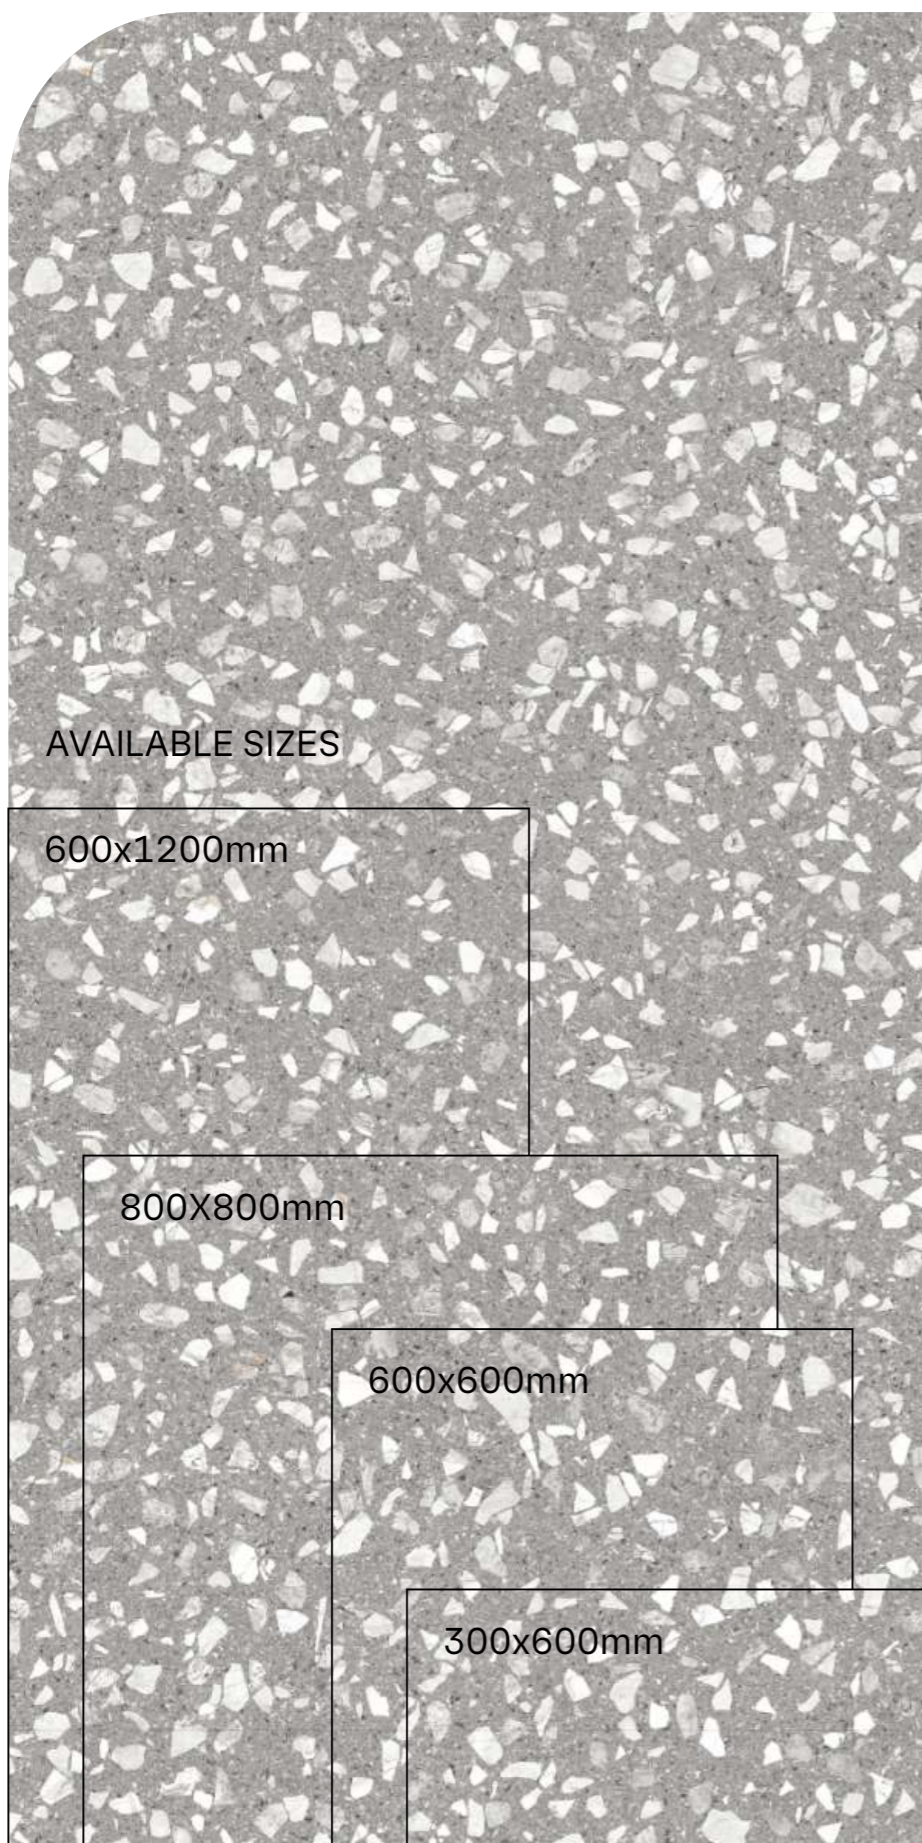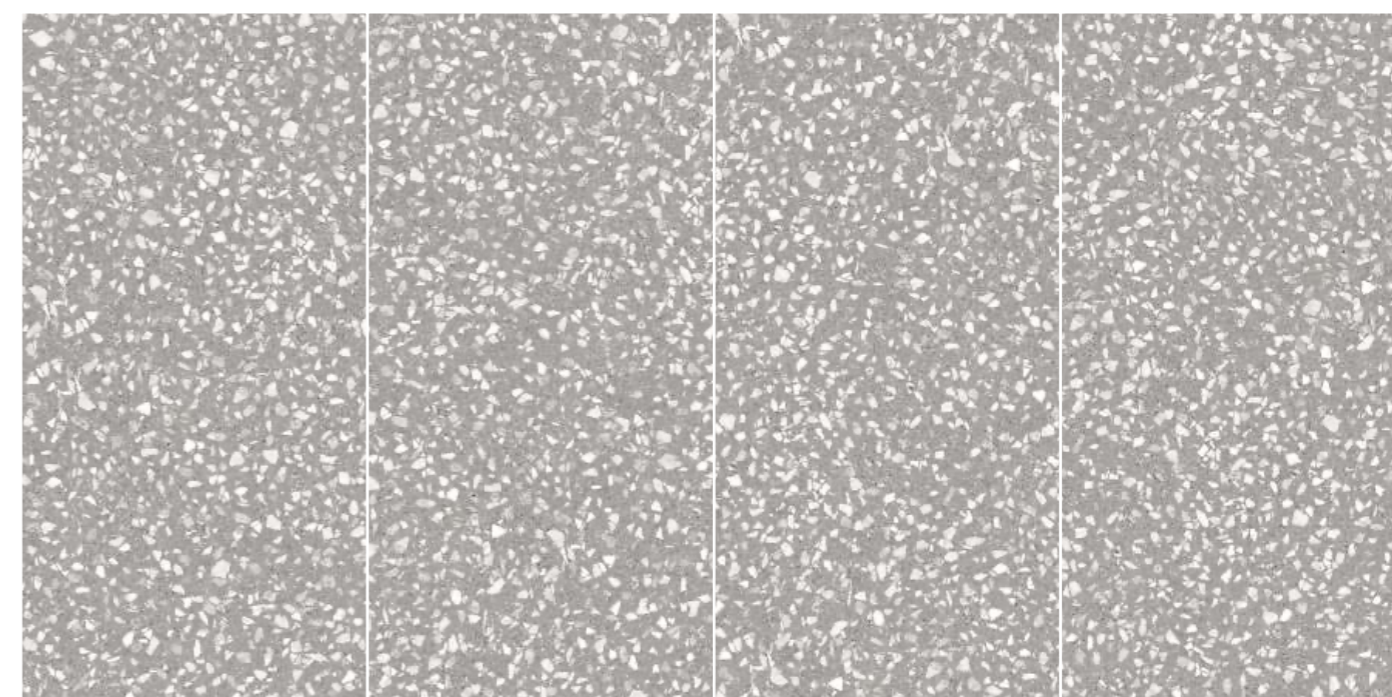



Terrzo Dark Grey

TECHNICAL SPECIFICATION

CHARACTERISTIC	STANDARD AS PER ISO-13006/EN 14411 GROUP BIa	MEAN VALUE OF POLISHED GVT	MEAN VALUE OF RUSTIC GVT	TEST METHOD
REGULATORY PROPERTIES				
Deviation in length & width	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2
Deviation in thickness	±5.0 %	±4.0 %	±4.0 %	ISO-10545-2
Straightness in side	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2
Rectangularity	±0.5 %	±0.1 %	±0.1 %	ISO-10545-2
Surface flatness	±0.5 %	±0.2 %	±0.2 %	ISO-10545-2
Color difference	Unaltered	No change	No change	ISO-10545-16
Glossiness	As per mfg	Min 90%	Min 4%	GLOSSOMETER
STRUCTURAL PROPERTIES				
Water absorption	< 0.50 %	< 0.20 %	< 0.20 %	ISO-10545-3
Apparent density	> 2.0 g/cc	>2.10 g/cc	>2.10 g/cc	DIN 51082
MASSIVE MECHANICAL PROPERTIES				
Modulus of rupture	Min. 35 N/mm ²	Min. 40 N/mm ²	Min. 40 N/mm ²	ISO-10545-4
Breaking strength	Min. 1300 N	Min. 2000 N	Min. 2000 N	ISO-10545-4
Impact resistance	As per mfg.	Min. 0.55	Min. 0.55	ISO-10545-5
SURFACE MECHANICAL PROPERTIES				
Surface abrasion resistance	As per mfg.	Min. Class-3	Min. Class-4	ISO-10545-7
MOH's hardness	As per mfg.	Min. 4	Min. 5	EN 101
THERMO HYGROMETRIC PROPERTIES				
Frost resistance	No damage	No damage	No damage	ISO-10545-12
Thermal shock resistance	No damage	No damage	No damage	ISO-10545-9
Moisture expansion	Nil	Nil	Nil	ISO-10545-10
Thermal expansion (COE)	Max. 9.0 x 10 ⁻⁶	Max. 6.5x10 ⁻⁶	Max. 6.5 x 10 ⁻⁶	ISO-10545-8
Crazing resistance	As per mfg.	Min. 10 Cycle	Min. 10 Cycle	ISO-10545-11
CHEMICAL PROPERTIES				
Chemical resistance	No damage	No damage	No damage	ISO-10545-13
Stain resistance	Resistant	Resistant	Resistant	ISO-10545-14
SAFETY PROPERTIES				
Slip resistance	As per mfg.	>0.40	>0.40	ISO-10545-17
Fire resistance	As per mfg.	Fire proof	Fire proof	N. A.
Lead & Cadmium given off by glazed tiles	As per mfg.	Does not yield Pb & Cd	Does not yield Pb & Cd	ISO-10545-15

PACKAGING DETAILS

SR. NO	PRODUCT	NOMINAL SIZE	THICKNESS	TILES PER BOX	COVERAGE AREA
1	VITRIFIED TILES	600x1200mm	9mm	2	1.44 Sq. Mtr.

SYMBOLS

Icons

Technical Specification



Application symbol





Thank You

SIYATONE
BY SIYARAM

SIYATONE GLOBAL PVT LTD

Regd. Office : Survey No. 105/1 P2,
Opp. Intel Vitrified, Jambudiya,
Morbi - 363 642.

CIN : U46909GJ2024PTC156431

Call on : +91 9712590444
Email : info@siyatone.com